

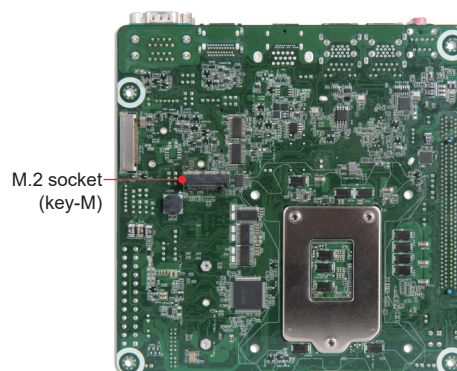




WADE-8211-Q370

Leading Desktop Intel® 8th Gen Core™ Processors Mini-ITX with DDR4 SO-DIMM up to 64G, VGA ,Dual DP ports ,Two GbE LAN ports, Five COM Ports

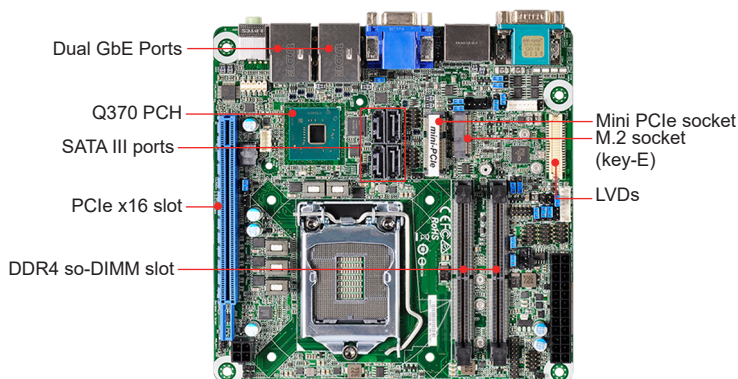


WADE-8211-Q370 is based on Intel® Q370 chipset and Desktop processors including Intel® 8th/9th Gen Core™ i3/i5/i7 SKU. This board supports DDR4, PCIe 3.0, and SATAIII. Those features help you to build high performance and stable system.

FEATURES

- Intel® 8th/9th Gen Core™ Processors support
- Supports two SO-DIMMs support DDR4 Non-ECC SDRAM up to 64GB
- Supports dual Ethernet, five COM Ports, eight USB Ports, four SATA III Ports and Audio
- Supports one PCIe x16 (Gen3), one M.2 Key E 2230 with PCIe x1, CNVi and USB2.0 for Wireless, one M.2 Key M 2242/2260/2280 with PCIe x4 and SATA3 for SSD and one mini-PCIe slot

REAR I/O

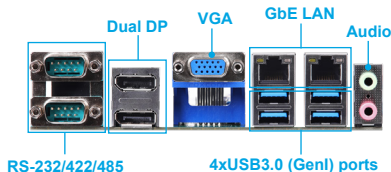

GENERAL

Processor	Intel® 8 th /9 th Gen Core™ Processors CPU in LGA1151 package
Chipset	Intel® Q370
BIOS	AMI uEFI BIOS
Memory	Supports up to 64GB DDR4 2400/2666MHz Non-ECC SDRAM on two SO-DIMM socket
Storage Devices	- Supports 4x SATA III ports - Supports RAID 0, 1, 5, 10
Watchdog Timer	Programmable watchdog timer, time out period from 1 sec to 255 secs.
Hardware Monitoring	System monitor (Voltage, Fan Speed and Temperature)
Expansion Interface	- 1x PCIe x16 Gen 3 - 1x M.2 Key E 2230 with PCIe x1, CNVi and USB2.0 for Wireless - 1x M.2 Key M 2242/2260/2280 with PCIe x4 and SATA3 for SSD - 1x mini-PCIe slot

I/O INTERFACE

Super I/O	NCT6116D
Audio	- Realtek AL887 High Definition Audio integrated in Intel SoC - Audio Jack on rear I/O with Line-out/ Mic-in
Ethernet	- Intel® I219LM & I210AT Ethernet controller - 2x RJ45 connectors on rear I/O
Serial port	- 2x RS-232/422/485 ports on REAR I/O - 3x RS-232 ports on board pin header
USB	- 4x USB3.0 on rear I/O - 4x USB2.0 on board pin header
GPIO	8-bit configurable controlled by embedded controller

DISPLAY

Graphic Controller	- Intel® UHD Graphics 630 supports DirectX 12, OpenGL 4.5 - Video decode HW acceleration support for H.264, H.265, MPEG2, VC-1/WMV9, JPEG, VP8, and VP9
Display Interface	- LVDS: Dual channel 2bit LVDS on board, resolution up to 1920 x1200 - DDI: Dual DP ports on rear I/O, resolution up to 4096x2340 - VGA: One VGA port on rear I/O resolution up to 1920x1200

ORDERING GUIDE

AB1-3D63	(R) WADE-8211-Q370 Mini-ITX ESB.Q370 w/o ECC LGA1151.w/ DDR4 SODIMM /VGA/Dual DP/Dual GbE/ COM/Audio/USB
----------	---

PACKING LIST

One WADE-8211-Q370 Main board
One I/O shield
One Installation CD
One SATA cable
One CPU cooler bracket

Mechanical & Environment

Dimension	170mm(L) x 170mm(W) x 1.6mm(H)
Power Supply	ATX power input
Environment	- Operation Temperature: 0°C to 60°C - Storage Temperature: -20°C to 80°C - Relative Humidity: 5% to 95%, non-condensing
MTBF	Over 100,000 hours at 40°C

